


12-VOLT PUMPS

GPI HIGH-FLOW ELECTRIC GEAR PUMPS

Special applications require a special pump. Do you need a 8, 15, 18, or 25 GPM pump? GPI offers models with or without hose and nozzle and with a straight or

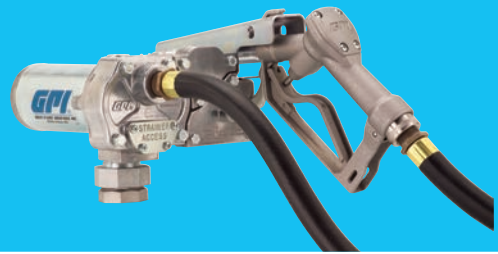

MODEL	M-180S-ML or -AU	M-240S-MU
PART NUMBER	110300-1 w/manual nozzle 110300-2 w/auto nozzle 110300-3 w/manual nozzle & CE Approval 110300-4 w/auto nozzle & CE Approval	110000-70 w/manual nozzle 110000-91 w/manual nozzle & CE Approval
VOLTAGE & TYPE	12-volt DC - Rotary Gear Explosion proof motor.	24-volt DC - Rotary Gear Explosion proof motor.
FLOWRATE	Up to 18 GPM (69 LPM)	Up to 15 GPM (57 LPM)
DUTY CYCLE	30 min. On / 30 min. Off	30 min. On / 30 min. Off
POWER CORD	18 ft. (5.5m) x 12/2 AWG	18 ft. (5.5m) x 12/2 AWG
NOZZLE	Choice of Manual or Automatic Shutoff	Manual Shutoff
INLET/OUTLET SIZE	1 in. / 1 in.	1 in. / 3/4 in.
SUCTION PIPE	Adjustable to 40 in.	Adjustable to 40 in.
HOSE	12 ft. (3.7m) x 1 in.	12 ft. (3.7m) x 3/4 in.
MOTOR PROTECTION	Circuit breaker	Circuit breaker
UNIQUE FEATURE	Improved flowrate and convenient Spin Collar.	Convenient Spin Collar for easy installation.
USE WITH	Gasoline (up to 15% alcohol blends such as E15), diesel fuel (up to 20% biodiesel blends such as B20) and kerosene.	
APPROVALS	U.L. Listed Motor. CSA Certified Flammable Liquid Dispenser.	U.L. Listed Motor. CSA Certified Flammable Liquid Dispenser.
WARRANTY	2 Year	2 Year